



Elizabeth Rose Triscari

Director, Corporate Counsel

Pennsylvania-American Water Company

852 Wesley Drive, Mechanicsburg, PA 17055

P: 717.550.1574 F: 717.531.3399 C: 717.585.1934

elizabeth.triscari@amwater.com

February 11, 2020

VIA ELECTRONIC FILING

Ms. Rosemary Chiavetta, Secretary
Commonwealth of Pennsylvania
Pennsylvania Public Utility Commission
Commonwealth Keystone Building
400 North Street
Harrisburg, PA 17120

In Re: Application of Pennsylvania-American Water Company for approval of the right to offer, render, furnish or supply wastewater service to the public in an additional portion of South Coatesville Borough, Chester County Pennsylvania – Docket No. A-2020-3015680

Dear Secretary Chiavetta:

In response to your letter of February 4, 2020, attached for filing please find Pennsylvania-American Water Company's Responses to Data Request Set II propounded by the Bureau of Technical Utility Services.

If you should have any questions, please do not hesitate to contact me.

Sincerely,

Elizabeth Rose Triscari

jrh

enclosures

cc: Janelle Eckman (*via electronic and first-class mail*)

Bureau of Technical Utility Services - Water/Wastewater Division

Data Request Set 2

Application of Pennsylvania American Water Company – Wastewater Division for the approval of the right to offer, render, furnish or supply wastewater service to the public in an additional portion of South Coatesville Borough, Chester County at Docket No. A-2020-3015680

A-10. PAWC-WD's response to Data Request A-6 included an Alternative Analysis page that indicated the existing PAWC-WD force main in West Chester Road is a 4-inch diameter pipe. In Docket Nos A-2009-2129046 and A-2010-2210320, two previous PAWC-WD applications for additional territory on West Chester Road in South Coatesville Borough, both applications indicated the force main in West Chester Road is a 4-inch diameter pipe. However, in this Application, PAWC-WD indicated the force main in West Chester Road is a 6-inch diameter pipe. Please clarify the size of the force main in West Chester Road and explain the apparent discrepancy.

Response: There are two separate force mains in that portion of West Chester Road. The first force main is a 6" diameter pipe from the Robins Cove Lift Station and the other force main is a 4" diameter pipe from the Brinton #1 Lift Station. The 6" diameter pipe is in the middle of the road and the 4" inch diameter pipe is on the north side of the road. PAWC stated that it would be connecting to the 6" diameter pipe due to the greater distance to the 4" diameter pipe. Ideally PAWC would like to tie into the 4" diameter pipe, but PAWC does not know if it would be physically possible due to other utility interference such as electrical and gas lines.

Response Provided by: James R. Kelly, Senior Supervisor – Operations (Coatesville)
Pennsylvania-American Water Company

Bureau of Technical Utility Services - Water/Wastewater Division

Data Request Set 2

Application of Pennsylvania American Water Company – Wastewater Division for the approval of the right to offer, render, furnish or supply wastewater service to the public in an additional portion of South Coatesville Borough, Chester County at Docket No. A-2020-3015680

A-11. If the force main in West Chester Road is a 4-inch diameter force main, please revise the total list of appurtenances (i.e., saddle, corporation, curb stop, curb box, etc.) to reflect two connections to the 4-inch diameter force main.

Response: The only change for the appurtenances if PAWC attached to the 4" diameter force main would be that the size of the saddle would be 4" instead of 6". The number of items and sizes for the lateral would stay the same. However, as stated in the response to A-10, PAWC is connecting to the 6" force main, not the 4" force main.

Response Provided by: James R. Kelly, Senior Supervisor – Operations (Coatesville)
Pennsylvania-American Water Company

Bureau of Technical Utility Services - Water/Wastewater Division

Data Request Set 2

Application of Pennsylvania American Water Company – Wastewater Division for the approval of the right to offer, render, furnish or supply wastewater service to the public in an additional portion of South Coatesville Borough, Chester County at Docket No. A-2020-3015680

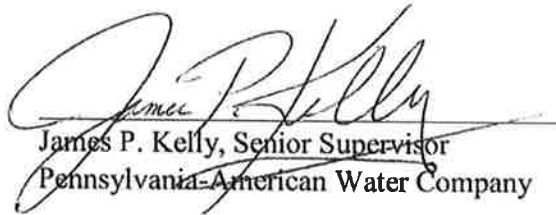
A-12. PAWC-WD's response to Data Request A-3 indicated the total cost for installation of both laterals is \$8,000. Please provide a detailed cost breakdown that includes material type descriptions, material sizes, material quantities, unit quantity costs, and extended costs.

Response: Fittings will cost approximately \$350, Pipes will cost \$50-\$100 and permitting will cost approximately \$150. It is estimated that the trench size will be 25' x 5'. For a trench that size, paving would be approximately \$1,000 at \$7.00/sq. ft. It is unknown how long it will take for the work to be performed. Due to this, PAWC estimates that labor for paving and excavation will be approximately \$6,000. For material type descriptions, material size and quantities, please see paragraph 8 and Exhibit C of PAWC's Application filed on January 7, 2020.

Response Provided by: James R. Kelly, Senior Supervisor – Operations (Coatesville)
Pennsylvania-American Water Company

VERIFICATION

I, James P. Kelly hereby state that the facts above set forth above are true and correct to the best of my knowledge, information and belief, and that I expect to be able to prove the same at a hearing held in this matter. I understand that the statements made herein are made subject to the penalties of 18 Pa. Cons. Stat. §4904 (relating to unsworn falsification to authorities).


James P. Kelly, Senior Supervisor
Pennsylvania American Water Company

Dated: 2/11/20