

**REGER RIZZO
DARNALL LLP**
ATTORNEYS AT LAW

Margaret A. Morris
Partner
mmorris@regerlaw.com

Cira Centre, 13th Floor
2929 Arch Street
Philadelphia, PA 19104

Main: 215.495.6500
Direct: 215.495.6524

March 13, 2025

Via Electronic Filing

Rosemary Chiavetta, Esquire
PA Public Utility Commission
Secretary
P.O. Box 3265
Harrisburg, PA 17105-3265

Re: Docket No. A-2025-_____
Application of PECO Energy Company
SEPTA Rail Crossing Alteration: Tabor Road, Philadelphia, PA

Dear Secretary Chiavetta:


Attached for filing is the Application of PECO Energy Company (PECO) for approval to alter the below-grade crossing of SEPTA tracks located at Tabor Road in the City of Philadelphia.

As indicated on the Certificate of Service, a copy of PECO's Application has been provided to the Service List in the manner indicated.

If there are any questions, or concerns, please do not hesitate to contact me.

Very truly yours,

Reger Rizzo & Darnall LLP

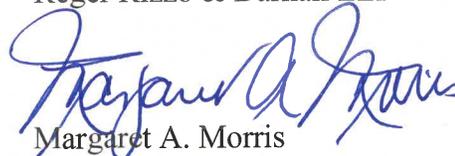

Margaret A. Morris

SPM/co
Enclosures

cc: William Sinick, Rail Safety Engineering, PA Public Utility Commission [w/encl.]
Jack Garfinkle, Esquire, Exelon Business Services [w/encl.]
Service List [w/encl.]

Re: Docket No. A-2025-_____
Application of PECO Energy Company
SEPTA Rail Crossing Alteration: Tabor Road, Philadelphia, PA

CERTIFICATE OF SERVICE

I hereby certify that a true and correct copy of the foregoing document has been served upon the following person(s), **VIA ELECTRONIC MAIL**, in accordance with the requirements of 52 Pa. Code § 1.54 (relating to service by a participant).

Mark Chappell, P.E., Division Chief
PA Department of Transportation
Right-of-Way, Utilities and Grade
Crossing Division
400 North Street, 7th Floor
P.O. Box 3362
Harrisburg, PA 17105-3362
marchappel@pa.gov

Jeffrey M. Spotts, Esquire
Chief Counsel
PA Department of Transportation
Keystone Building
400 North St., 9th Floor
Harrisburg, PA 17120
jespotts@pa.gov

Din Abazi, P.E.
District Executive
PA Department of Transportation
District 6-0
7000 Geerdes Boulevard
King of Prussia, PA 19406
dabazi@pa.gov

Timothy Z. Dragan
Project Manager
SEPTA
1234 Market Street, 13th Floor
Philadelphia, PA 19107
tdragan@septa.org

Kristin Del Rossi, Commissioner
Department of Streets
City of Philadelphia
1401 John F. Kennedy Boulevard,
7th Floor
Philadelphia, PA 19102
kristin.delrossi@phila.gov

Anthony Phillips, Councilmember
Philadelphia City Council District 9
City Hall, Room 594
Philadelphia, PA 19107
anthony.phillips@phila.gov

Kenyatta Johnson
City Council President
City Hall, Room 494
Philadelphia, PA 19107
kenyatta.johnson@phila.gov

Date: March 13, 2025



Margaret A. Morris, Esquire

**BEFORE THE
PENNSYLVANIA PUBLIC UTILITY COMMISSION**

Application of PECO Energy Company for the :
Approval to alter the below-grade crossing of three :
(3) tracks of SEPTA (DOT# 592556A) so as to : Docket No. A-2025- _____
install ducts for a 15kV electrical crossing within :
Tabor Road in the City of Philadelphia, Philadelphia :
County, Pennsylvania. :

**APPLICATION OF PECO ENERGY COMPANY TO ALTER BELOW-GRADE
CROSSING AT TABOR ROAD, PHILADELPHIA COUNTY**

TO PENNSYLVANIA PUBLIC UTILITY COMMISSION:

1. The name and address of the Applicant is PECO Energy Company, 2301 Market Street, Philadelphia, PA 19101-8699 (Applicant or PECO).

2. The Applicant is a public utility incorporated under Pennsylvania Law and is a subsidiary corporation of the Exelon Corporation. The Applicant, *inter alia*, provides electric service in Pennsylvania. As an electric utility, PECO avers it has the corporate right to utilize the public below-grade crossing of three (3) SEPTA tracks, located at Tabor Road, Philadelphia, Philadelphia County (the Crossing), so as to install 2-5” ducts for a 15kV electrical crossing to meet the current and future electrical demands of its customers within the City of Philadelphia (Project).

3. PECO is represented by the following counsel:

Margaret A. Morris, Esquire (authorized to receive service)
Reger Rizzo & Darnall LLP
Cira Centre, 13th Floor
2929 Arch Street
Philadelphia, PA 19104
(215) 495-6524 (voice)
(215) 495-6600 (fax)
mmorris@regerlaw.com

4. The Plan and Profile drawing is provided as Attachment 1.

5. The Applicant notified the following entities *via* Electronic Mail, including the Plan and Profile, explaining its reason for the Project and its intention to obtain Commission approval to alter the Crossing described herein:

Mark Chappell, P.E.
Division Chief
PA Department of Transportation
Right-of-Way, Utilities and Grade
Crossing Division
400 North Street, 7th Floor
P.O. Box 3362
Harrisburg, PA 17105-3362
marchappel@pa.gov

Jeffrey M. Spotts, Esquire
Chief Counsel
PA Department of
Transportation
Keystone Building
400 North St., 9th Floor
Harrisburg, PA 17120
jespotts@pa.gov

Din Abazi, P.E.
District Executive
PA Department of
Transportation
District 6-0
7000 Geerdes Boulevard
King of Prussia, PA 19406
dabazi@pa.gov

Timothy Z. Dragan
Project Manager
SEPTA
1234 Market Street, 13th Floor
Philadelphia, PA 19107
tddragan@septa.org

Kristin Del Rossi, Commissioner
Department of Streets
City of Philadelphia
1401 John F. Kennedy
Boulevard, 7th Floor
Philadelphia, PA 19102
kristin.delrossi@phila.gov

Anthony Phillips,
Councilmember
Philadelphia City Council
District 9
City Hall, Room 594
Philadelphia, PA 19107
anthony.phillips@phila.gov

Kenyatta Johnson
City Council President
City Hall, Room 494
Philadelphia, PA 19107
kenyatta.johnson@phila.gov

6. The Applicant estimates the overall cost of the Project to be \$250,000 and agrees to bear all the costs incurred in furnishing material and performing the work necessary to install the 2-5" PVC ducts at the Crossing


7. The Applicant avers it is necessary and proper for the accommodation, convenience and service of the public that the Commission authorize the requested work at the Crossing.

8. A field visit is not required.

9. The Applicant does not request a hearing prior to issuance of an order approving the Application. Any hearing required to determine the final allocation of costs can be held after issuance of an order approving the requested alterations at the Crossing at the parties' initial cost and after completion of the work.

WHEREFORE, PECO Energy Company, requests that its Application to alter the public below-grade crossing of three (3) SEPTA tracks (DOT # 592556A), located at Tabor Road, Philadelphia, Philadelphia County (the Crossing), to install 2-5" ducts for a 15kV electrical crossing, be approved.

Respectfully submitted,

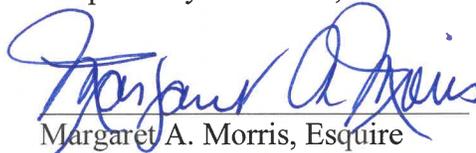

Margaret A. Morris, Esquire

Attorney I.D. # 75048

Cira Centre, 13th Floor

2929 Arch Street

Philadelphia, PA 19104

(215) 495-6524 (voice)

(215) 495-6600 (fax)

mmorris@regerlaw.com


Dated: March 13, 2025

Counsel for PECO Energy Company

VERIFICATION

I, Robert C. Winegrad of PECO Energy Company, hereby state that the facts in the foregoing document(s) are true and correct to the best of my knowledge, information and belief. I understand that false statements therein are made subject to the penalties of 18 Pa. C.S. § 4904, relating to unsworn falsifications to authorities.

Dated: March 12, 2005

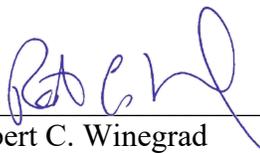


Robert C. Winegrad
Real Estate Department
PECO Energy Company

Re: Docket No. A-2025-_____
Application of PECO Energy Company
SEPTA Rail Crossing Alteration: Tabor Road, Philadelphia, PA

Attachment 1

Plan and Profile

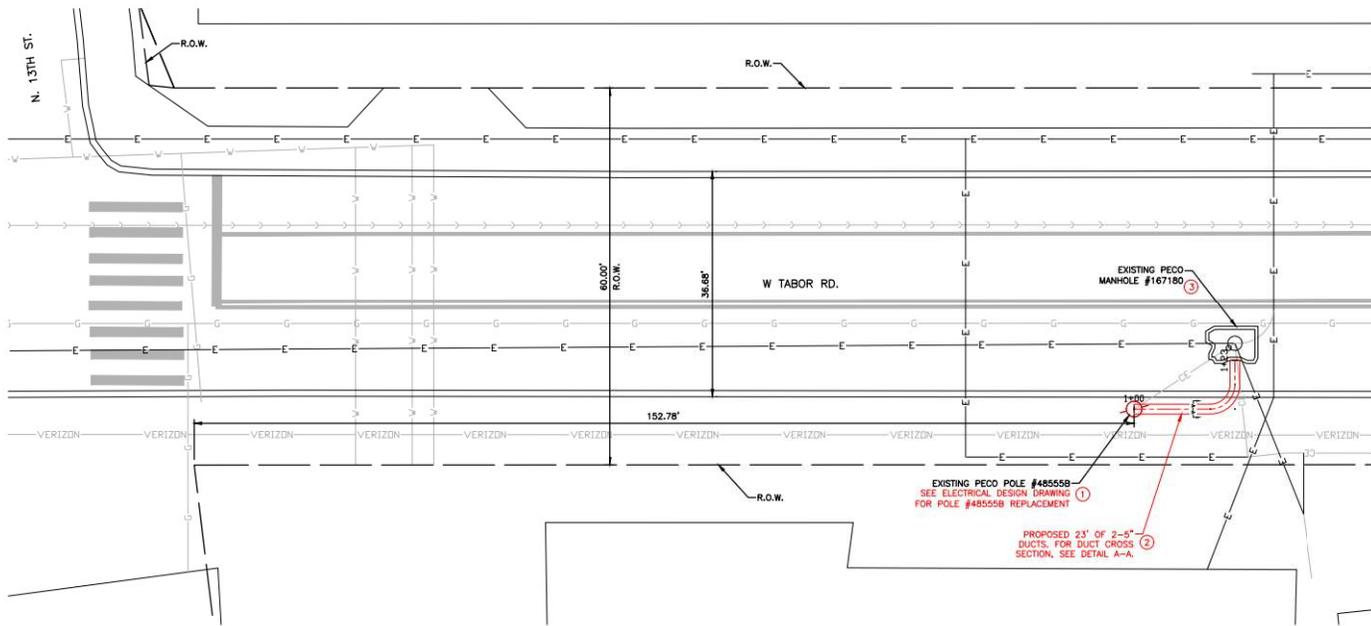

GENERAL NOTES:

- 36" MINIMUM COVER SHALL BE MAINTAINED ON THE PROPOSED PECO DUCTS.
- ALL PROPOSED CONDUITS SHALL BE CONCRETE ENCASED AND CONSTRUCTED PER ALL APPLICABLE PECO SPECIFICATIONS INCLUDING BUT NOT LIMITED TO: S-2070, S-2071-76, S-2080, S-2100, S-2107, S-2132, S2166, S-2170, S-2204.
- EXTREME CAUTION MUST BE TAKEN TO AVOID DAMAGE TO ANY WATER MAIN OR WATER APPURTENANCES. IF DAMAGE OCCURS, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL NECESSARY REPAIRS.
- TRENCH WIDTH SHALL NOT EXCEED 3 FEET AT UTILITY CROSSINGS.
- USE EXTREME CAUTION NEAR ALL GAS FACILITIES. HAND EXCAVATION IS REQUIRED TO LOCATE AND EXPOSE GAS MAINS PRIOR TO CROSSING AND WORKING WITHIN 3 FEET OF ALL GAS FACILITIES.
- HAND EXCAVATION IS REQUIRED TO FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF THE WATER MAINS PRIOR TO CROSSING. EXTREME CAUTION MUST BE TAKEN TO AVOID DAMAGE TO ANY WATER FACILITIES.

**TASK #XX
INSTALL CONDUIT**

- EXISTING PECO POLE #48555B
EXCAVATE AND INSTALL APPROXIMATELY 23' OF 2-5" PVC DUCTS FROM EXISTING PECO POLE #48555B TO SOUTH WING WALL OF EXISTING PECO MANHOLE #167180. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100 AND RESTORATION DETAILS ON SHEET G-04. SEE ELECTRICAL DESIGN DRAWING FOR POLE #48555B REPLACEMENT.
- PROPOSED 2-5" PVC DUCTS
EXCAVATE AND INSTALL APPROXIMATELY 23' OF 2-5" PVC DUCTS BETWEEN EXISTING PECO POLE #48555B TO SOUTH WING WALL OF EXISTING PECO MANHOLE #167180. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100, S-2174, AND RESTORATION DETAILS ON SHEET G-04.
- EXISTING PECO MANHOLE #167180
IN EXISTING PECO MANHOLE #167180, POCKET 2-5" PVC DUCTS IN SOUTH WALL IN ACCORDANCE WITH PECO STANDARD S-2204. SEE MANHOLE DESIGN.


CONTRACTORS NOTE:

CONTRACTOR TO CONTACT PA ONE CALL (1-800-242-1776) THREE DAYS (MINIMUM) PRIOR TO BEGINNING WORK FOR UTILITY OBSTRUCTION MARKINGS IN STREET AND SIDEWALK. CARE SHOULD BE TAKEN TO LOCATE ALL OBSTRUCTIONS PRIOR TO EARTH REMOVAL. ALL OBSTRUCTIONS MAY NOT HAVE BEEN SHOWN ON THE DESIGN. EXCAVATION AND LOCATION OF OBSTRUCTIONS SHOULD BE FAR ENOUGH IN ADVANCE TO PERMIT REALIGNMENT OF DUCT AND (OR) MANHOLES IF NECESSARY.

SAFETY NOTE:

CAUTION SHALL BE USED TO INSURE THAT THE PROPER PERSONAL PROTECTIVE CLOTHING AND EQUIPMENT ARE USED. HARD HAT, GLOVES, SAFETY GLASSES AND P.P.E. ARE A MUST WHEN WORKING AROUND OR ON ENERGIZED FACILITIES.


ISSUED FOR
IFC REV 1
02/05/2025

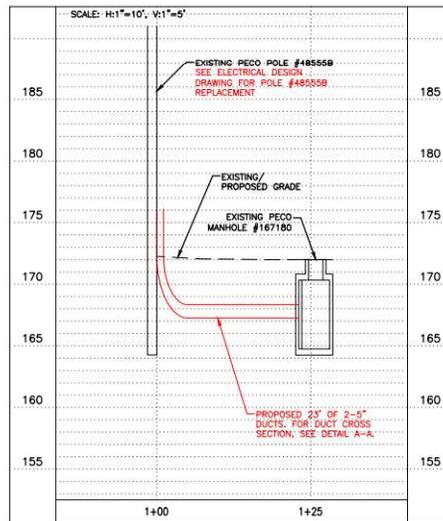

CONTACT LIST		
AHMED SAAD	DESIGNER	267-255-2554
AUSTIN SQUILLACE	ENGINEER	267-566-8841
PA ONE CALL DESIGN NUMBER 20232073444		
E.C.#0000300097	 BUCKSMONT REGION ENGINEERING & DESIGN	
ACCORD# 4208		
QUAD# 142D7GB		
WO#18637428		

ELKINS PARK PACKAGE 16
CITY OF PHILADELPHIA

		DRAWING NAME
DRAWN BY	DATE	PLAN AND PROFILE
PRIMERA	01/15/25	SHEET: 01 OF 02

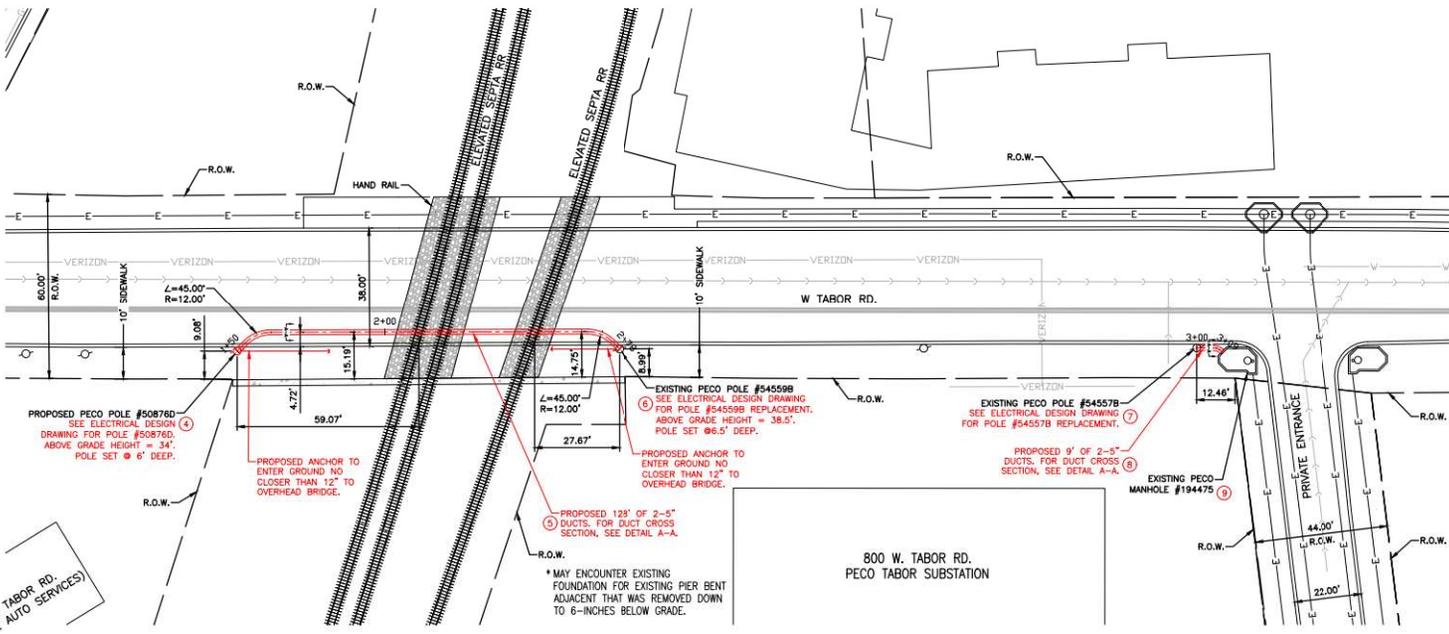

- GENERAL NOTES:**
- 36" MINIMUM COVER SHALL BE MAINTAINED ON THE PROPOSED PECO DUCTS.
 - ALL PROPOSED CONDUITS SHALL BE CONCRETE ENCASED AND CONSTRUCTED PER ALL APPLICABLE PECO SPECIFICATIONS INCLUDING BUT NOT LIMITED TO: S-2070, S-2071-N, S-2080, S-2100, S-2107, S-2132, S2166, S-2170, S-2204.
 - EXTREME CAUTION MUST BE TAKEN TO AVOID DAMAGE TO ANY WATER MAIN OR WATER APPURTENANCES, IF DAMAGE OCCURS, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL NECESSARY REPAIRS.
 - TRENCH WIDTH SHALL NOT EXCEED 3 FEET AT UTILITY CROSSINGS.
 - USE EXTREME CAUTION NEAR ALL GAS FACILITIES. HAND EXCAVATION IS REQUIRED TO LOCATE AND EXPOSE GAS MAINS PRIOR TO CROSSING AND WORKING WITHIN 3 FEET OF ALL GAS FACILITIES.
 - HAND EXCAVATION IS REQUIRED TO FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF THE WATER MAINS PRIOR TO CROSSING. EXTREME CAUTION MUST BE TAKEN TO AVOID DAMAGE TO ANY WATER FACILITIES.

**TASK #09
INSTALL CONDUIT**

- PROPOSED PECO POLE #508760
EXCAVATE AND INSTALL APPROXIMATELY 128' OF 2-5" PVC DUCTS FROM PROPOSED PECO POLE #508760 TO EXISTING PECO POLE #545598. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100 AND RESTORATION DETAILS ON SHEET G-04. SEE ELECTRICAL DESIGN DRAWING FOR POLE #508760 INSTALLATION.
- PROPOSED 2-5" PVC DUCTS
EXCAVATE AND INSTALL APPROXIMATELY 128' OF 2-5" PVC DUCTS BETWEEN PROPOSED PECO POLE #508760 AND EXISTING PECO POLE #545598. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100, S-2174, AND RESTORATION DETAILS ON SHEET G-04.
- EXISTING PECO POLE #545598
EXCAVATE AND INSTALL APPROXIMATELY 128' OF 2-5" PVC DUCTS FROM PROPOSED PECO POLE #508760 TO EXISTING PECO POLE #545598. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100 AND RESTORATION DETAILS ON SHEET G-04. SEE ELECTRICAL DESIGN DRAWING FOR POLE #545598 REPLACEMENT.
- EXISTING PECO POLE #545578
EXCAVATE AND INSTALL APPROXIMATELY 9' OF 2-5" PVC DUCTS FROM EXISTING PECO POLE #545578 TO THE NORTHWEST WING WALL OF EXISTING PECO MANHOLE #194475. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100 AND RESTORATION DETAILS ON SHEET G-04. SEE ELECTRICAL DESIGN DRAWING FOR POLE #545578 REPLACEMENT.
- PROPOSED 2-5" PVC DUCTS
EXCAVATE AND INSTALL APPROXIMATELY 9' OF 2-5" PVC DUCTS BETWEEN EXISTING PECO MANHOLE #194475 EXISTING PECO POLE #545578. BACKFILL AND RESTORE IN ACCORDANCE WITH PECO STANDARD S-2100, S-2174, AND RESTORATION DETAILS ON SHEET G-04.
- EXISTING PECO MANHOLE #194475
IN EXISTING PECO MANHOLE #194475, POCKET 2-5" PVC DUCTS IN NORTHWEST WING WALL IN ACCORDANCE WITH PECO STANDARD S-2204. SEE MANHOLE DIAGRAM.

CONTRACTORS NOTE:

CONTRACTOR TO CONTACT PA, ONE CALL (1-800-242-1776) THREE DAYS (MINIMUM) PRIOR TO BEGINNING WORK FOR UTILITY OBSTRUCTION MARKINGS IN STREET AND SIDEWALK. CARE SHOULD BE TAKEN TO LOCATE ALL OBSTRUCTIONS PRIOR TO EARTH REMOVAL. ALL OBSTRUCTIONS MAY NOT HAVE BEEN SHOWN ON THE DESIGN. EXCAVATION AND LOCATION OF OBSTRUCTIONS SHOULD BE FAR ENOUGH IN ADVANCE TO PERMIT REALIGNMENT OF DUCT AND (OR) MANHOLES, IF NECESSARY.

SAFETY NOTE:



CAUTION SHALL BE USED TO INSURE THAT THE PROPER PERSONAL PROTECTIVE CLOTHING AND EQUIPMENT ARE USED. HARD HAT, GLOVES, SAFETY GLASSES AND P.P.E. ARE A MUST WHEN WORKING AROUND OR ON ENERGIZED FACILITIES.


ISSUED FOR
IFC REV 1
02/05/2025

CONTACT LIST		
AHMED SAAD	DESIGNER	267-255-2554
AUSTIN SQUILLACE	ENGINEER	267-566-8841
PA ONE CALL DESIGN NUMBER 20232073445		
E.C.#0000300097		
ACCORD# 4207-2	BUCKSMONT REGION	
QUAD# 142DBH3	ENGINEERING & DESIGN	
WO#18637428		

ELKINS PARK PACKAGE 16
CITY OF PHILADELPHIA

		DRAWING NAME	
DRAWN BY	DATE	PLAN AND PROFILE	
PRIMERA	01/15/25	SHEET: 02 OF 02	

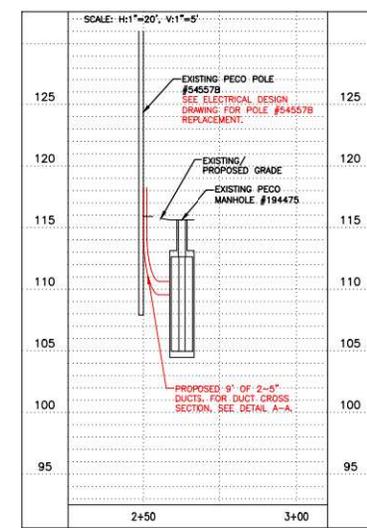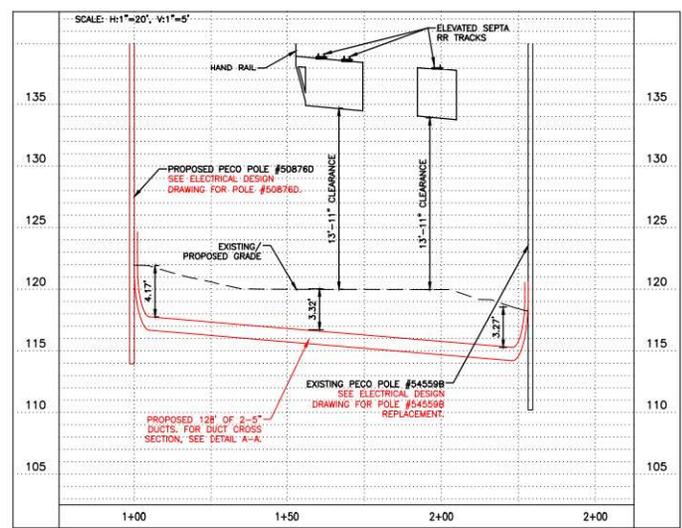

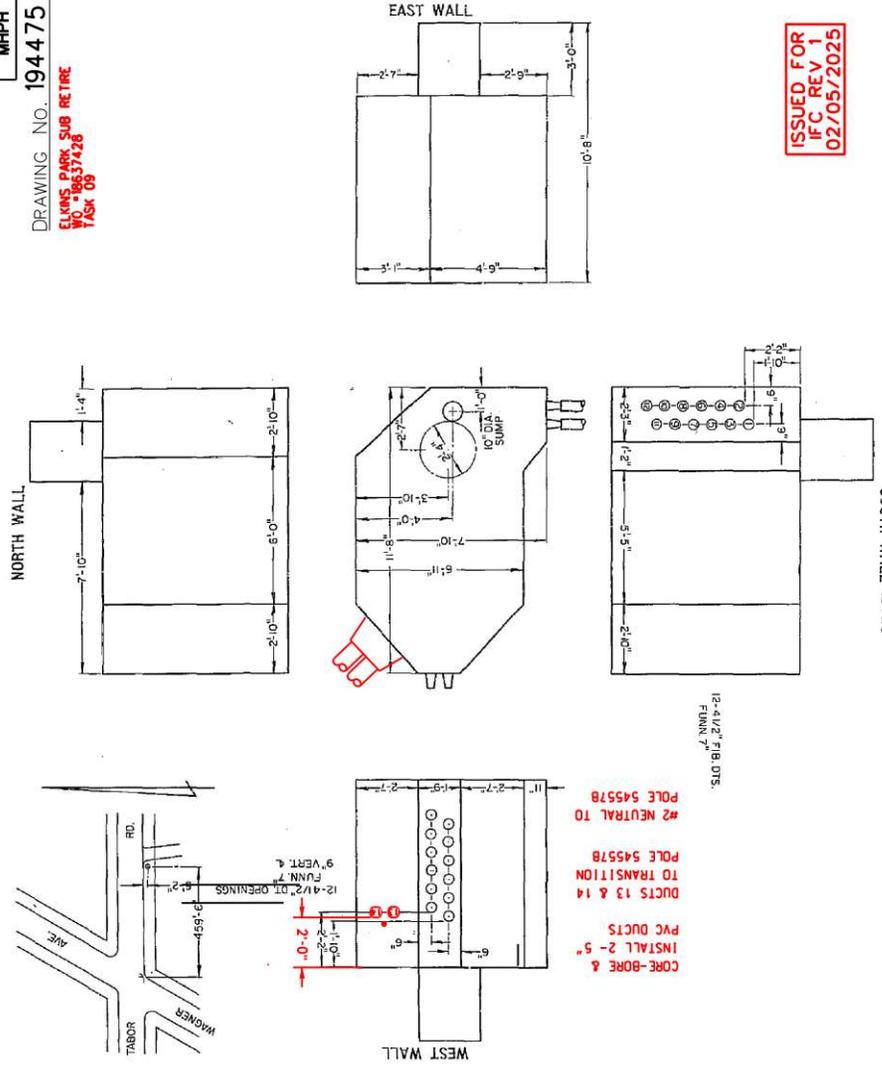

ISSUED FOR
IFC REV 1
02/05/2025

SOUTH WALL 194475

NORTH WALL			SOUTH WALL			EAST WALL			WEST WALL					
NO. OF DUCT	SYMBOL	MAKE OF CABLE	SIZE	DATE INST.	NO. OF DUCT	SYMBOL	MAKE OF CABLE	SIZE	DATE INST.	NO. OF DUCT	SYMBOL	MAKE OF CABLE	SIZE	DATE INST.
1					1					1				
2					2					2				
3					3					3				
4					4					4				
5					5					5				
6					6					6				
7					7					7				
8					8					8				
9					9					9				
10					10					10				
11					11					11				
12					12					12				
13					13					13				
14					14					14				
15					15					15				
16					16					16				
17					17					17				
18					18					18				
19					19					19				
20					20					20				
21					21					21				
22					22					22				

OWNERSHIP: PECO ENERGY CO.
CONSTRUCTION: CONCRETE
TYPE COVER: 31" C.I. LD. 10" CSTG.
DATE BUILT: 1968 JOB NO. 3-9228
DATE REBUILT: _____ JOB NO. _____
WALL THICKNESS: 8"

PHILADELPHIA REGION

LABOR RD. S. SIDE
459-6" E.E.C.L. AGRER AVE.
PECO ENERGY COMPANY

SCALE: _____ DESIGN: _____ CHECKED: _____ APPROVED: _____ DATE: _____

SHEET 01 OF 01 194475 03

TABLE OF ADDITIONS & CHANGES
USE ONLY PRINTS SHOWING LATEST DATE

DATE	DESCRIPTION	BY	DATE
03/05/24	INCCRP EC 164459.	A	
03/05/24		B	