



26525N26469
40.8894322, -76.7903487
> REPLACE 50-3 POLE WITH 55-2 POLE USING 7.5' BURIED DEPTH
> ENSURE NEUTRAL AT OR ABOVE 39'-0"




CERTIFIED CORRECT PLANS
Will M. D. P.E.
 Professional Engineer
 Approved by Bureau of Technical Utility Services
PA PUBLIC UTILITY COMMISSION
 ATTEST *Matthew L. Handen* 05/8/2025
 Secretary Docket: A-2025-3054507

CABLES	WIRE SPEC	EXISTING	PROPOSED
Primary	1/0 ACSR 60 MIL XLP (6/1)	39'-2"	44'-7"
Neutral	1/0 ACSR (6/1)	33'-9"	38'-3"
Fiber Optic Com		29'-11"	32'-4"
Fiber Optic Com		29'-10"	32'-1"
Fiber Optic Com		28'-11"	31'-3"
Telco Com		27'-7"	30'-1"
Telco Com		26'-5"	29'-2"

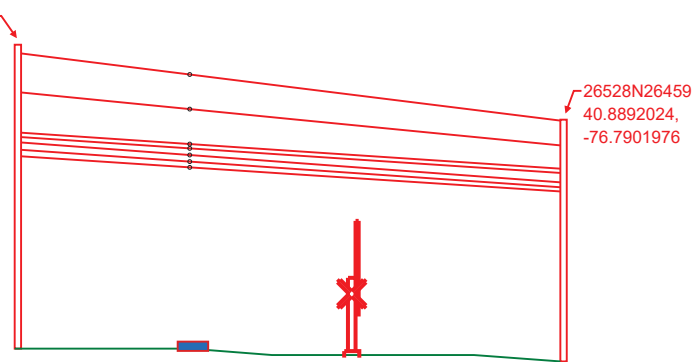


ppl
 PPL Electric Utilities

PREPARED BY: 

TITLE: 13881240	COUNTY: Northumberland	STATE: Pennsylvania	DATE: 03-04-2025
PROJECT NO:	PRINT NO: 1	NO. OF PRINTS: 1	ENGINEERED BY: KATAPULT
FILENAME: EXHIBIT A			